

OFERTA COMERCIALA PROFESIONALA

Parc Fotovoltaic cu Sistem de Stocare Energie (BESS)

5,132.4 kWp PV | 10.24 MWh BESS | VISCRI – Brasov

Beneficiar:	VISCRI	Locatie:	SICRI – BRASOV
Putere instalata:	5,132.4 kWp	Panouri:	7,896 x AIKO ABC 650W
Stocare BESS:	10.24 MWh (2 x 5.12 MWh)	Invertoare:	16 x Huawei SUN2000-330KTL
Termen executie:	90 zile PIF + 90 zile montaj	Referinta:	SHC-PV-VISCRI-2026
Data ofertei:	Iunie 2026	Valabilitate:	30 zile de la emitere

VALOARE TOTALA FARA TVA

RON 23,502,804

EUR 4,635,661.54

VALOARE CU TVA (19%)

EUR 5.516.437

RON 27,968,337

SC Smart House Color SRL

Nicoras Ionut Vasile

CUI: RO37283429 | J02/770/2017 | Arad, Romania

ANRE A3 nr.24114 | E1 nr.23835 | E2
nr.23836

ISO 9001/14001/45001/27001 | EPC Contractor Fotovoltaic


Contact: SC Smart House Color SRL – Arad


1. Sumar Executiv – Indicatori Cheie

Parametri tehnici si financiari principali ai proiectului

Putere instalata DC	Stocare BESS	Productie An 1	Investitie totala
5,132 kWp	10.24 MWh	6,036 MWh	EUR 4.64M
7,896 x AIKO ABC 650W	2 x Dunext 5.12 MWh	degradare inclusa (AIKO)	RON 23,502,804 fara TVA
IRR (25 ani)	NPV (disc. 8%)	Payback simplu	Profit net 25 ani
13.9%	€2.73M	7.2 ani	€13.49M
Rata interna de rentabilitate	Valoare actualizata neta	Recuperare investitie	Venit net dupa toate costurile

Flux de Numerar Cumulat - 25 Ani

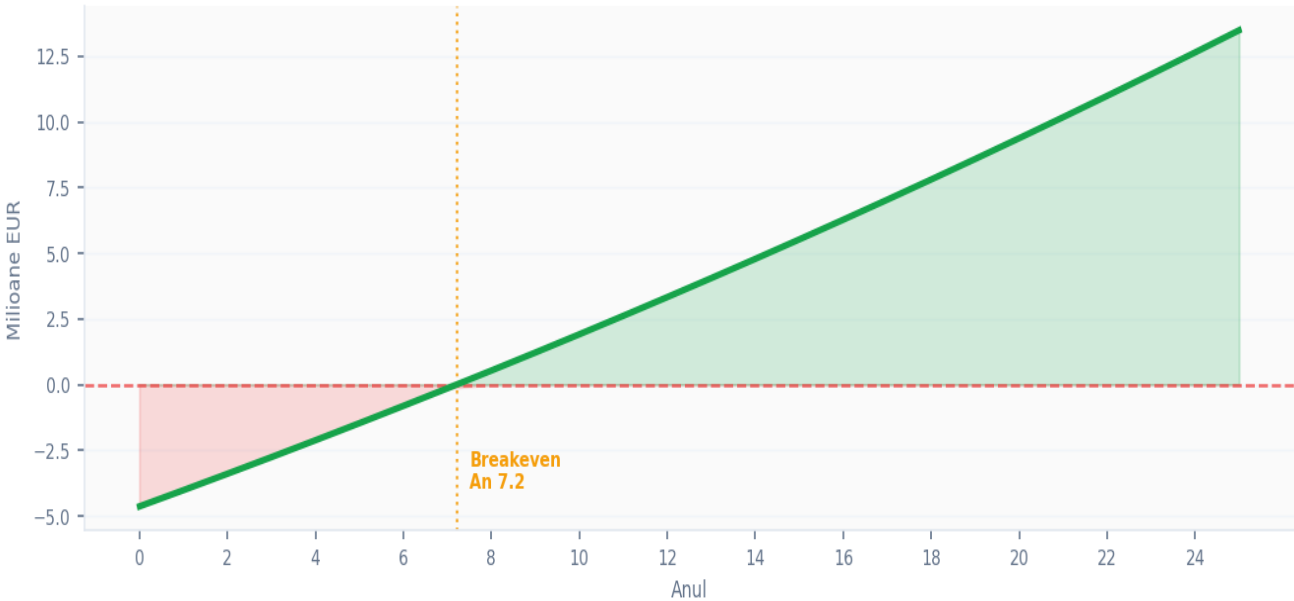


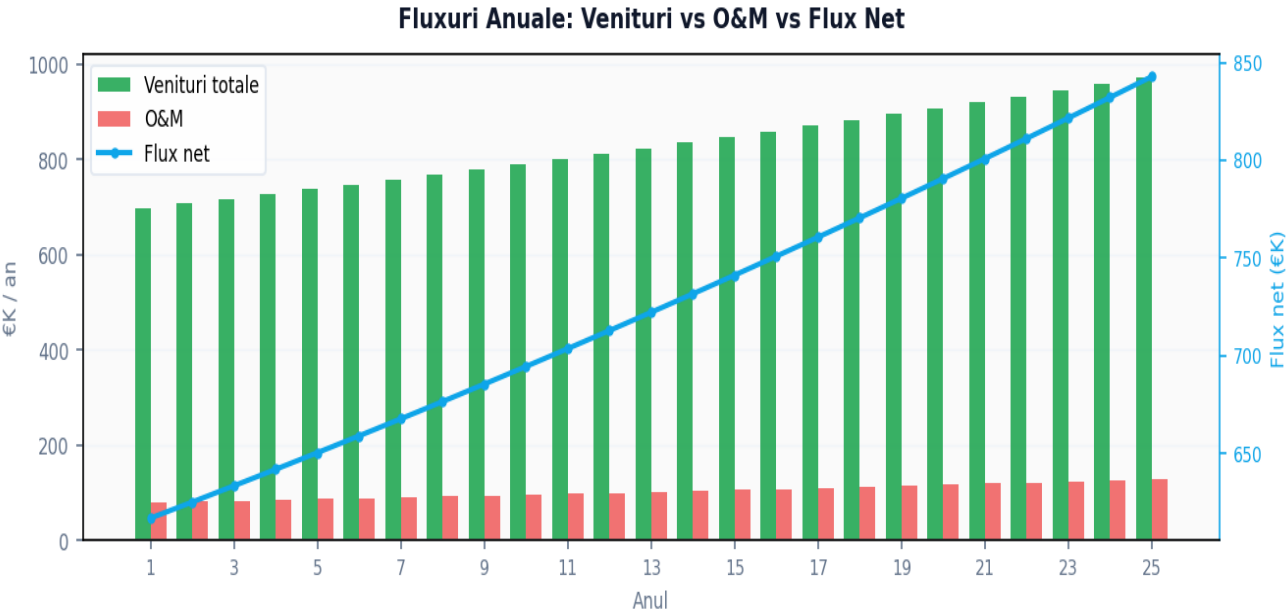

2. Specificatii Tehnice

Date tehnice detaliate ale sistemului fotovoltaic si de stocare



Beneficiar	VISCRI	Iradierie specifica (Brasov)	1,200 kWh/kWp/an
Locatie	SICRI – BRASOV, Romania	Productie An 1 (neta)	6,036 MWh/an
		Productie totala 25 ani	142.578 MWh
Putere instalata DC	5,132.4 kWp	Degradare An 1 (AIKO spec)	<= 2.0%
Numar panouri	7,896 buc	Degradare anuala	<= 0.45%/an
Tip panou	AIKO ABC 650W (IEC Class A)	Eficienta sistem (PR)	~80%
		Eficienta panou An 25	87.2%
Eficienta panou	>23% (heterojunction HJT)	BESS – cicluri/an	250 cicluri
Numar invertoare	16 buc	BESS – spread arbitraj	0.06 EUR/kWh
Tip inverter	Huawei SUN2000-330KTL	CO2 evitat/an	~3,621 tone CO2e
		Echivalent gospodarii/an	~2,100 locuinte
Putere AC totala	5,280 kW	Pret energie An 1	0.09 EUR/kWh
Stocare BESS totala	10.24 MWh (2 unitati)	Escaladare pret energie	2%/an
Tip BESS	DUNEXT 5.12 MWh per unitate		
Smart Meter	1 buc (monitorizare productie)		
Suprafata estimata	~80,000 m²		
Imprejmuire	2,500 ml		
Sistem prindere	5,132 buc + contragreutati		
Cablu solar	2 x 38,000 m (RED + BLACK)		
Termen executie	90 zile de la PIF + 90 zile montaj		
Garantie inverter	5 ani (service Romania)		
Garantie panouri	25 ani (garantie liniara productie AIKO)		
Garantie executie	36 luni de la receptie		

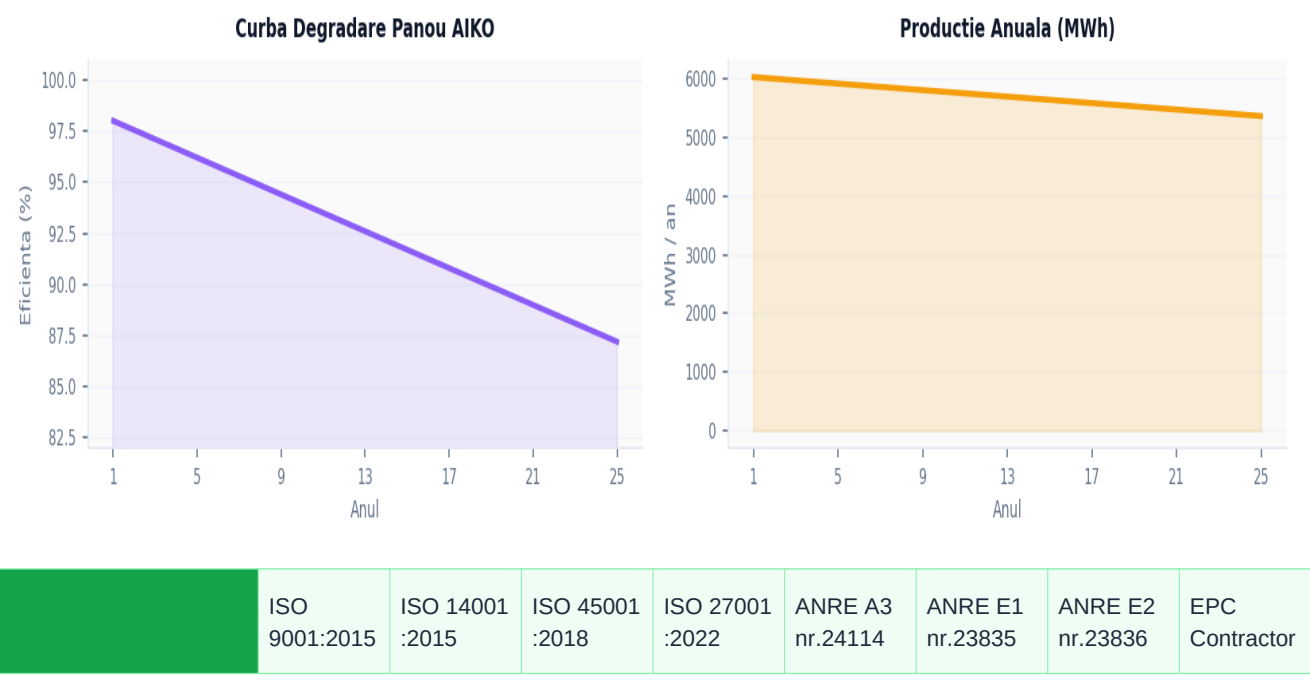

3. Analiza Financiara & ROI

Model financiar proiectat pe 25 ani – productie, venituri, costuri si rentabilitate

IRR	NPV (disc.8%)	PAYBACK	ROI TOTAL	PROFIT NET
13.9%	€2.73M	7.2 ani	290%	€13.49M
Rentabilitate interna/an	Valoare actualizata neta	Recuperare investitie	25 ani vs investitie	Venit net 25 ani

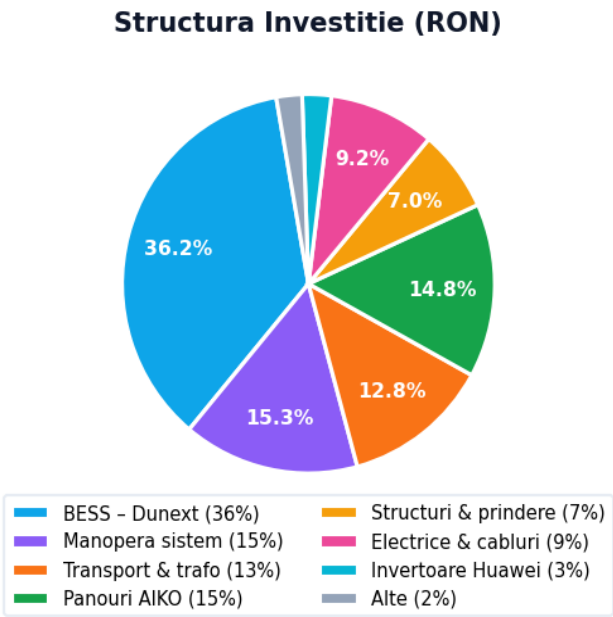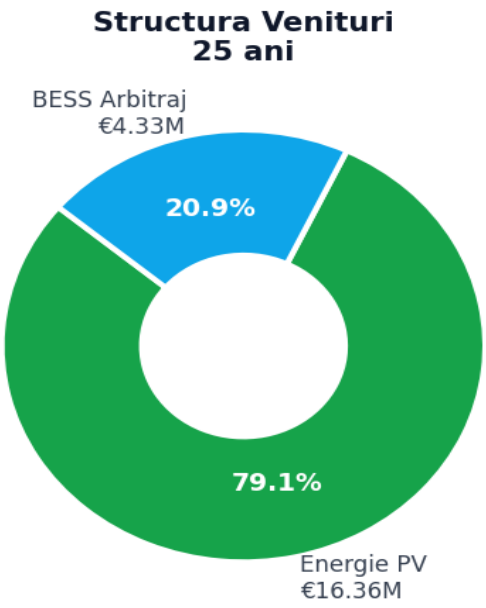

INDICATOR	VALOARE	OBSERVATII
Investitie initiala	€4.635.662	fara TVA
Venituri totale brute (25 ani)	€20.69M	PV + BESS arbitraj
Total O&M; (25 ani)	€2.56M	mentenanta + asigurari + management
Profit net 25 ani	€13.49M	venituri – O&M; – investitie
Productie totala 25 ani	142.578 MWh	cu degradare anuala AIKO 0.45%/an
CO2 evitat total	~90,500 tone CO2e	coeficient 0.6 kgCO2/kWh

4. Proiectie Financiara Anuala – 25 Ani

Venituri, costuri de operare si flux de numerar cumulat

An	Productie (MWh)	Venit Energie (EUR)	Venit BESS (EUR)	Total Venituri (EUR)	O&M; (EUR)	Flux Net (EUR)	CF Cumulat (EUR)
1	6.035	543.213	153.600	696.813	80.000	616.813	-4.018.848
2	6.007	551.533	155.105	706.638	81.600	625.038	-3.393.809
3	5.980	559.968	156.625	716.594	83.232	633.362	-2.760.447
4	5.952	568.521	158.160	726.681	84.896	641.784	-2.118.662
5	5.924	577.191	159.710	736.901	86.594	650.307	-1.468.355
6	5.897	585.981	161.275	747.256	88.326	658.930	-809.425
7	5.869	594.892	162.855	757.747	90.092	667.654	-141.770
8	5.841	603.924	164.451	768.376	91.894	676.481	534.711
9	5.813	613.080	166.063	779.144	93.732	685.411	1.220.122
10	5.786	622.361	167.690	790.052	95.607	694.444	1.914.567
11	5.758	631.767	169.334	801.102	97.519	703.582	2.618.150
12	5.730	641.301	170.993	812.295	99.469	712.825	3.330.975
13	5.703	650.964	172.669	823.633	101.459	722.174	4.053.150
14	5.675	660.757	174.361	835.118	103.488	731.630	4.784.780
15	5.647	670.680	176.070	846.751	105.558	741.193	5.525.973
16	5.619	680.737	177.795	858.533	107.669	750.863	6.276.837
17	5.592	690.928	179.538	870.466	109.822	760.643	7.037.481
18	5.564	701.253	181.297	882.551	112.019	770.532	7.808.013
19	5.536	711.716	183.074	894.790	114.259	780.531	8.588.545
20	5.509	722.317	184.868	907.185	116.544	790.640	9.379.185
21	5.481	733.056	186.680	919.737	118.875	800.861	10.180.047
22	5.453	743.937	188.509	932.447	121.253	811.193	10.991.241
23	5.425	754.959	190.357	945.317	123.678	821.638	11.812.879
24	5.398	766.125	192.222	958.348	126.151	832.196	12.645.076
25	5.370	777.436	194.106	971.542	128.674	842.867	13.487.944
TOTAL	142.578			€20.69M	€2.56M	€18.12M	€13.49M

IPOTEZE MODEL FINANCIAR

- | | | |
|-------------------------------------|-------------------------------------|--|
| • Pret energie An 1: 0.09 EUR/kWh | • Escaladare pret energie: 2%/an | • Iradiere specifica: 1,200 kWh/kWp/an |
| • Degradare panou An 1: 2.0% (AIKO) | • Degradare anuala: 0.45%/an (AIKO) | • BESS cicluri/an: 250 |

• BESS spread arbitraj: 0.06 EUR/kWh	• Degradare BESS: 1%/an capacitate	• O&M; baza: EUR 80,000/an
• Escaladare O&M;: 2%/an	• Rata scontare NPV: 8%/an	• Durata proiect: 25 ani

5. Deviz Oferta – Lista de Cantitati

Sistem fotovoltaic 5,132.4 kWp + Stocare 10.24 MWh | VISCRI-BRASOV

Nr.	Capitolul de Lucrari	UM	Cant.	Pret unit. (RON)	Valoare (RON)
1	TABLOU ELECTRIC GENERAL+AC+DC	BUC	20	10.000	200.000
2	SIGURANTE+MODUL ANTIINSULARIZARE	BUC	1	300.000	300.000
3	Pat cablu si legaturi	BUC	1	50.000	50.000
4	Accesorii TE CC+AC	BUC	1	250.000	250.000
5	Descarcator supratensiuni 2p 1000V-DC	BUC	500	75	37.500
6	Patron fuzibil DC-1000V	BUC	1000	18	18.000
7	Sociu fuzibil 10x38	BUC	1000	18	18.000
8	Accesorii (Cleme, prinderi, panza flex)	ANS	1	150.000	150.000
9	Uzura materiale	KWP	5132.4	10	51.324
10	AIKO ABC 650W	KWP	5132	680	3.489.760
11	Sistem de prindere – Inclusiv Suporti	BUC	5132	320	1.642.240
12	Bare 4.5m – Alex System	BUC	0	150	–
13	CONTRAGREUTATI	BUC	0	5	–
14	Clema Mijloc	BUC	10000	4	40.000
15	Clema Capat	BUC	2000	4	8.000
16	INVERTOR HUAWEI 330 KW	BUC	16	37.000	592.000
17	SMART METER	BUC	1	25.000	25.000
18	Mufe legatura MC4	BUC	3000	4,20	12.600
19	Copex Metalic-Negru	BUC	2500	5	12.500
20	Cablu Solar 1x6mmp-RED	M	38000	3,80	144.400
21	Cablu Solar 1x6mmp-BLACK	M	38000	3,80	144.400
22	Banda de izolat	BUC	100	3	300
23	Baterie DUNEXT 5.12 MWh	BUC	2	4.250.000	8.500.000
24	Cablu legatura RETEA-INVERTOR-RETEA	M	10000	50	500.000
25	Cablu impamantare panouri MYM-16mmp	M	100	10	1.000
26	Sapatura si tub corugat	m	3000	50	150.000
27	Cablu date FTP CAT6	M	3000	6	18.000
28	Tub PVC	M	3000	10	30.000
29	Material Marunt	ANS	1	150.000	150.000
30	IMPREJMUIRE	BUC	2500	150	375.000
31	Intocmire buletin priza de pamant	BUC	1	100	100
32	Manopera sistem	KWP	5132.4	700	3.592.680
33	TRANSPORT+MASINA+POST TRANSFORMARE	ANS	1	3.000.000	3.000.000

Nr.	Capitolul de Lucrari	UM	Cant.	Pret unit. (RON)	Valoare (RON)
TOTAL DEVIZ FARA TVA				RON	23.502.804
ECHIVALENT EURO FARA TVA (curs ~5.07)				EUR	4.635.661,54
TVA 19%				EUR	880.776
TOTAL CU TVA				EUR	5.516.437

NOTE

IMPORTANTE:

Invertor Huawei – 5 ani garantie in Romania

Panouri AIKO – garantie liniara 25 ani productie

Mentenananta si service se va discuta ulterior contractarii

Termen executie 90 zile PIF + 90 zile montaj

6. Termeni, Conditii & Date Emitent

Conditii comerciale, garantii si informatii despre contractant

Termeni & Conditii Comerciale		Date Emitent – SC Smart House Color SRL	
Valabilitate oferta	30 zile de la data emiterii	Companie	SC Smart House Color SRL
Termen executie	90 zile de la PIF + 90 zile montaj efectiv	CUI	RO37283429
		Reg. Com.	J02/770/2017
		Sediu social	Arad, Romania
Garantie invertoare Huawei	5 ani – service autorizat in Romania	ANRE A3	nr. 24114
Garantie panouri AIKO ABC 650W	25 ani – garantie liniara productie (IEC/TUV)	ANRE E1	nr. 23835
Garantie executie lucrari	36 luni de la receptia finala	ANRE E2	nr. 23836
Mentenanata & service post-garantie	Se negociaza la semnarea contractului	Certificari	ISO 9001/14001/45001/27001
Preturile nu includ TVA	TVA 19% se adauga conform legislatiei in vigoare	Rep. legal	Nicoras Ionut Vasile
Transport la locatie	Inclus in pretul ofertat	Referinta oferta	SHC-PV-VISCRI-2026
Racordarea la reseaua electrica	Responsabilitate beneficiar (inclusiv ATR)	Data emiterii	Iunie 2026
Avize si autorizatii	Responsabilitate beneficiar, asistenta tehnica SHC	Confidentialitate	Document confidential – uz intern
Plata	Transe conform grafic de executie (se convine contractual)		
Forta majora	Conform Codului Civil Roman		
Litigii	Jurisdictie Tribunalul Arad, legislatia romana		

Reprezentant SC Smart House Color SRL
Nicoras Ionut Vasile

Semnatura: _____ Data: Iunie 2026

L.S.

Reprezentant Beneficiar VISCRI

Semnatura: _____ Data: _____